

TAS LIFTING & SALES AND SERVICING

Hobart: 1 Lampton Avenue, Derwent Park, TAS 7009 | Ph: (03) 6272 8144
 Launceston: 279 Invermay Road, Invermay, TAS 7248 | Ph: (03) 6337 8444
 Cambridge: 4/2 Railway Court, Cambridge, TAS 7170 | Ph: (03) 6248 5761

BigHaul™ Wire Rope Hoist

A versatile portable and compact winch for pulling, lifting, lowering, spanning, 4WD recovery, and securing loads over large distances.




- Lightweight, safe, and easy to operate.
- Compact, high strength aluminium alloy housing with smooth contour design, a large flat base surface for increased stability in horizontal and vertical working positions.
- An overload protection system is built-in with a shearing pin in the forward lever which will shear when approximately 25% overloaded. The broken pins can be replaced without removing the load. Spare pins are located in the operating lever for RVBH08 and in the handle for RVBH16 and RVBH32.
- Forward and reverse lever placed in tandem, providing a slim compact design for storage and ensuring maximum power transfer.
- The rope clamp system is easily disengaged with a lever, allowing smooth installation of the wire rope.
- The Big Haul Creeper Winch comes complete with operating lever and 20m of wire rope mounted on a reel for all models. The wire rope is fitted with a safety latch hook at one end and is tapered at the other end for easy access into the unit.
- The Big Haul Creeper Winch has a parallel clamping system, which has a large surface contact area, providing an evenly distributed grip at a lower force that results in less rope wear. The system offers a longer rope advance and requires less handle pulling effort, thus increasing operator efficiency.
- All models are equipped with an anchor bolt that offers numerous connection possibilities with load hooks, wire rope and chain slings.
- All Big Haul Creeper Winches are tested and have individual serial numbers for easy traceability to a test certificate.
- Big Haul Creeper Winches are easy to maintain, service, and repair.
- Complies to AS1418.2


Product Code	518508	518516	518532
Rated Lifting Capacity	800kg	1600kg	3200kg
Pulling Capacity	1250kg	2500kg	5000kg
Wire Rope Diameter	8.3mm	11mm	16mm
Std Rope Length	20m	20m	20m
Rope Advanced per Full Stroke Cycle	60mm	60mm	40mm
Effort on Handling at Rated Lifting Capacity; Forward Operation	284kN	412kN	441kN
Nett Weight	7.5kg	12kg	13kg

Product Code	Model No.	Rated Lifting Capacity	B	C	D	E	F
518508	RVBH08	0.8t	165mm	230mm	60mm	800mm	-
518516	RVBH16	1.6t	190mm	300mm	75mm	790mm	1200mm
518532	RVBH32	3.2t	220mm	330mm	110mm	790mm	1200mm

518508

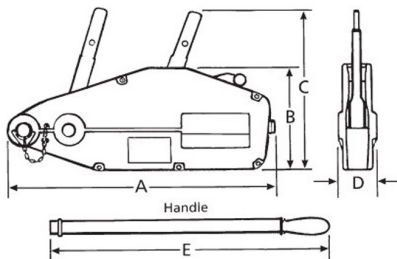

518516

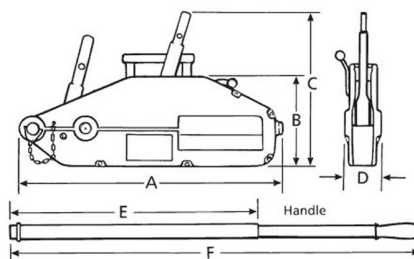

518532

